

GEVA 75 1/8" Solenoid Valves

General Description

GEVA 75 1/8" solenoid valves are based on GEVA 75 operators mounted on a plastic base.

These bases are available with or without flange, manual override as standard.

Applications

They are specially designed for irrigation control systems.


Notes

For other available voltages and to order valves manufactured to your specific requirements, please contact our technical sales department.

How to Order

Example : G75 - A - 11032-1

Is a GEVA 75 with flange, 1/8" BSP 3WNC 1.2 orifice ad 24VAC coil.

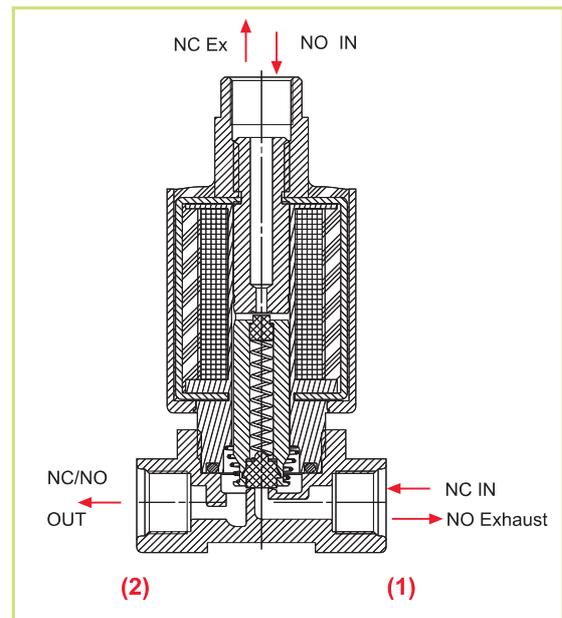

G75-A	Type	Port	Function	Orifice	Voltage
	with flange 1	1/8"BSP 10	2WNC 1	1 1	24 VAC 1
	without flange 2	1/8"NPT 11	3WNC 3	1.2 2	9-12VDC latch 2
	Brass 3		3WNO 4	1.6 3	12VAC 3
					12VDC 4
					24VDC 5
					24VDC latch 6
					110VAC 7

Technical Specifications

Ports size: 1/8" BSP or NPT

Materials: **Base & manual override:**

Reinforced Nylon

Seals:

EPDM

Solenoid:

See solenoid specifications

Pressure: See table

Mounting: Flange or by two tapping screws No.6

Voltage: 12, 24, 110, 230 AC

12, 24 DC

9-12, 24 V Latch


Protection class IP66

Max. Pressure




Pressure bar

Function	Orifice	AC	DC latch
2WNC	up to 2.0	12	12
3WNC	1	16	16
	1.2	11	11
3WNO	1.6	6	6
	1	16	16
	1.2	12	12
	1.6	8	8



Dimensions



	A	B	C
2WNC	-	60	65
3W	1/8	74	78

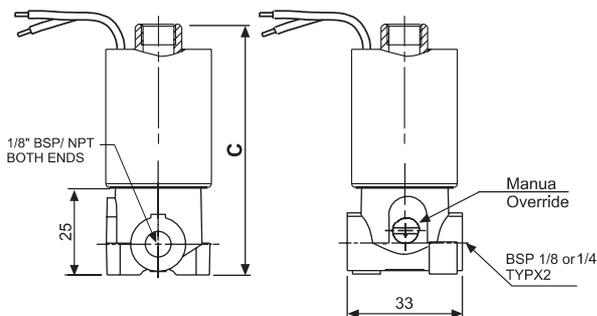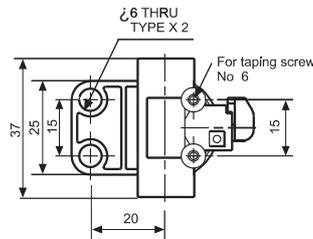

BRASS

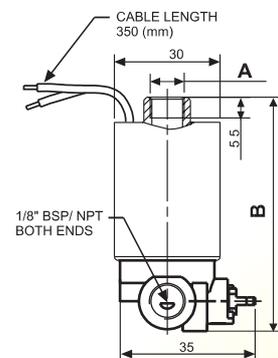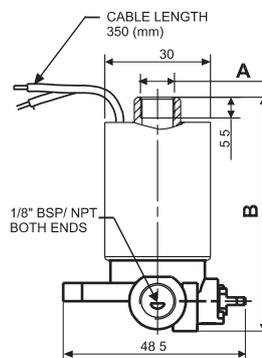

PLASTIC